
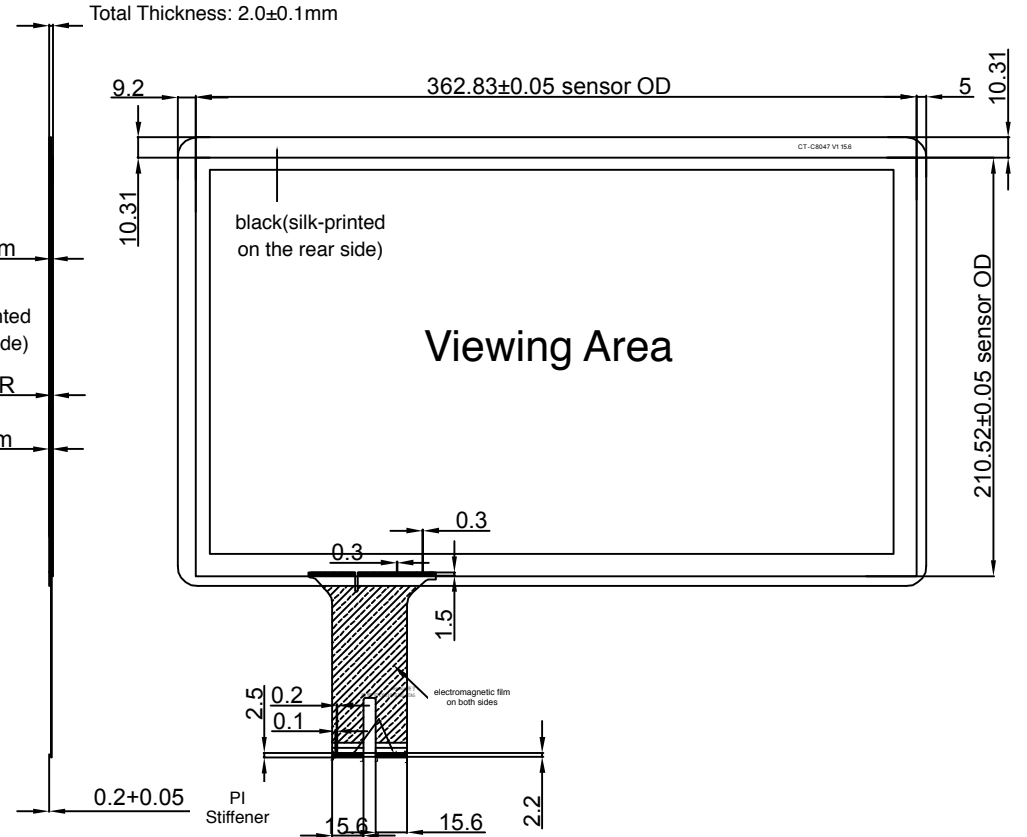


REV	MARK	HISTORY	DATE	NAME
REV.1	—	—	2017.08.12	LBC

Front View

Side View

Back View

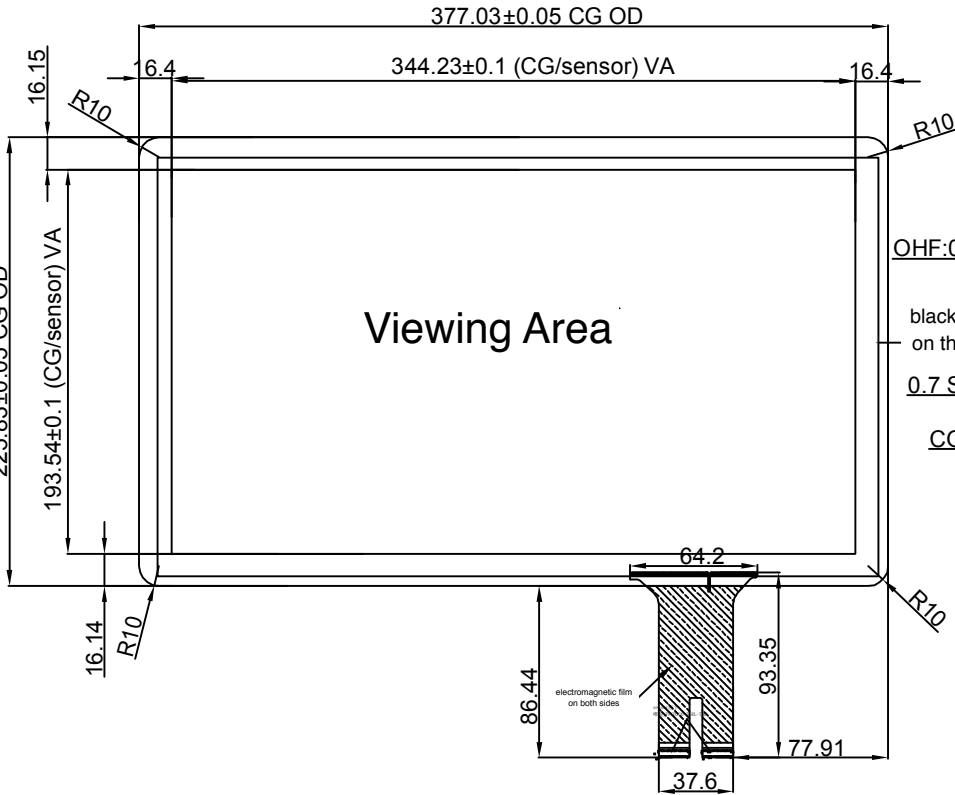

Notes:

1. Structure: G+G;
2. Type: COB; IC: ILI2302 Operating Voltage: 3.3V-5V
3. Transmittance: $\geq 85\%$
4. Hardless: 6H
5. Operating conditions: $-10^{\circ}\text{C} \sim +60^{\circ}\text{C}$, $\leq 85\% \text{RH}$
6. Storage conditions: $-10^{\circ}\text{C} \sim +65^{\circ}\text{C}$, $\leq 85\% \text{RH}$
7. Unspecified tolerance: $\pm 0.2 \text{mm}$
8. All materials in the drawing comply with the Rosh

CT-C8047 V1 15.6 工程图				SHEET	UNIT	SCALE	1st ANGLE PROJECTION
DESIGN	LBC	DATE	2017.08.12	1 of 1	mm	1:1	
CHECK		DATE		东莞市云上电子科技有限公司 Dong Guan CloudTop Electronic Technology Co.,Ltd			